


NOTES:

1. FOOTING BASE MAY BE CONSTRUCTED OF POURED IN PLACE CONCRETE OR PRECAST C.B. BLOCKS SET LEVEL WITH FULL MORTARED JOINTS.
2. THE FOOTING SHALL BE USED ON BOTH INLET AND OUTLET SECTIONS, THE PRIME FUNCTION IS TO PREVENT EROSION AND SETTLEMENT.



SCALE : NONE
DRAWN BY: SR
CHECKED BY: SMB
APPROVED BY: DAP
LAST REVISED:
4/29/2008

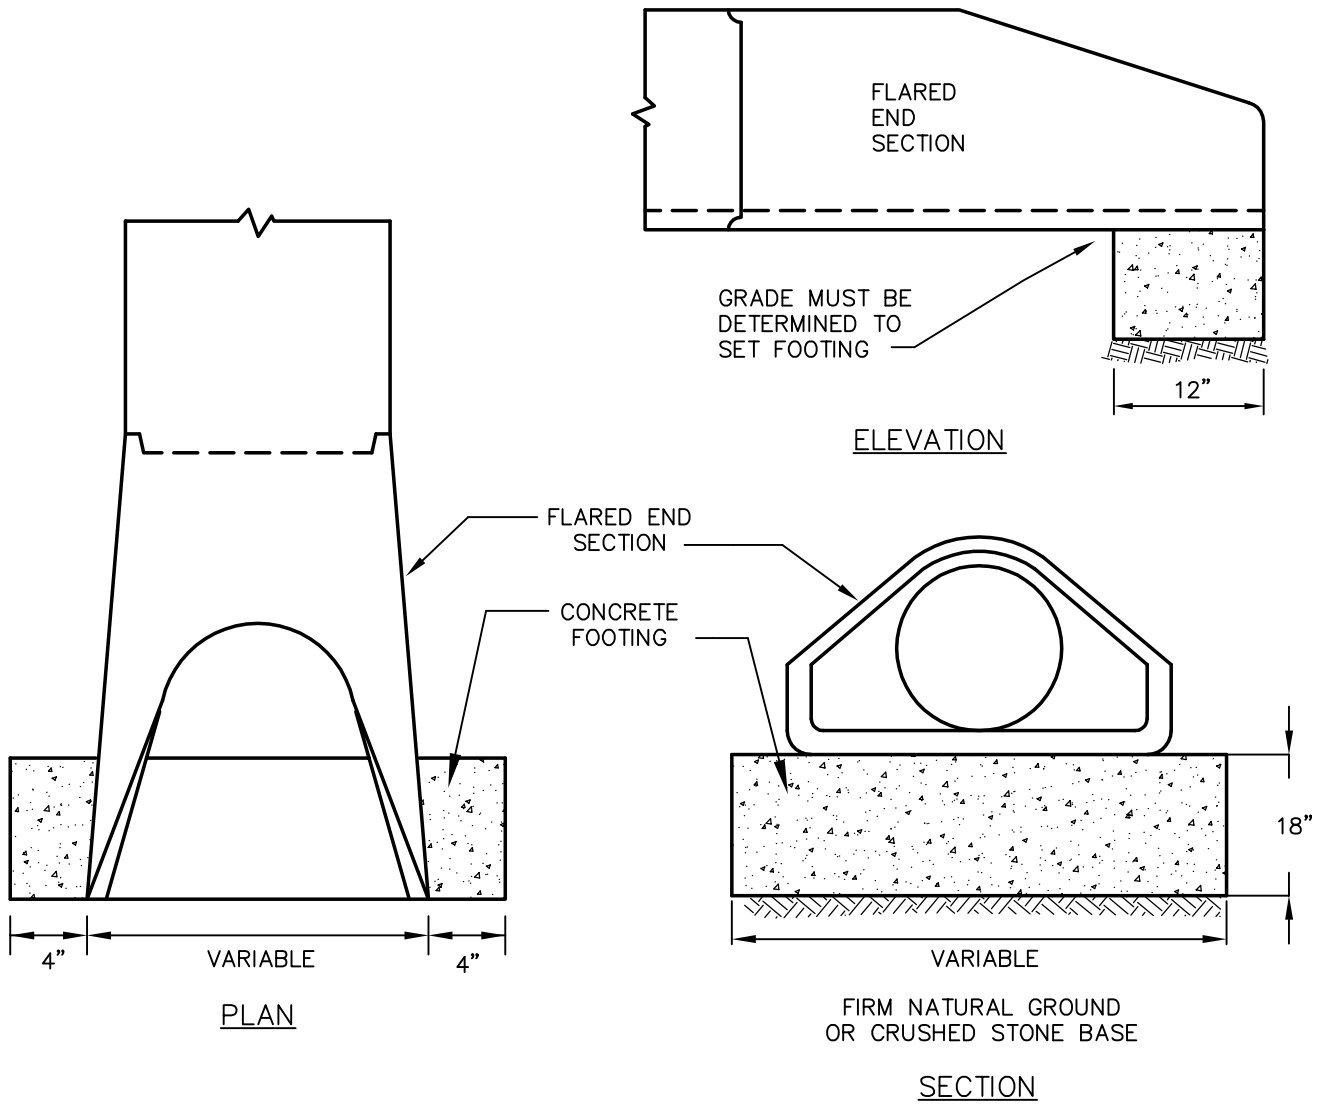

TOWN OF GLASTONBURY
DEPARTMENT OF PHYSICAL SERVICES
ENGINEERING DIVISION

CONCRETE FOOTING FOR
FLARED END SECTION

PLATE NO. 24